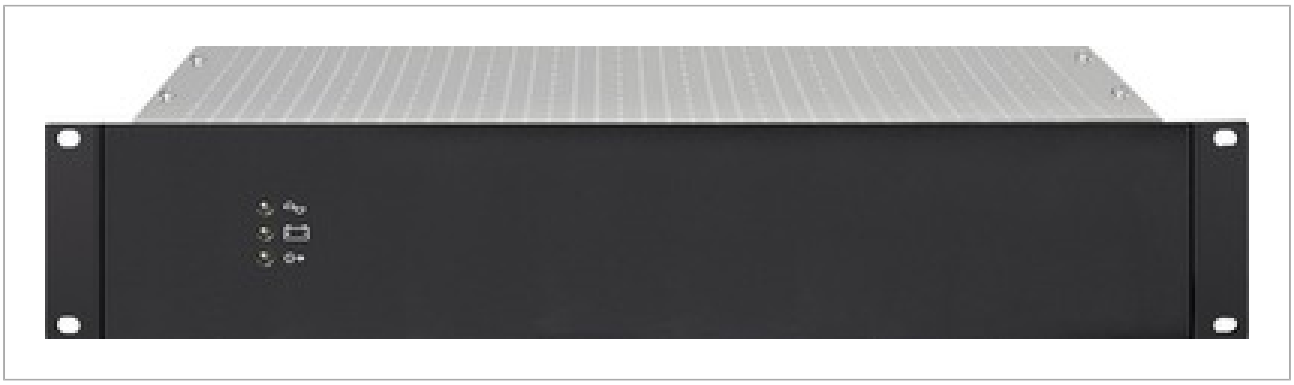


SON24V6AMS40RACK

Order no.: 1001532

PRODUCT INFORMATION

The SONAES series battery chargers (24 V DC) are designed for use in voice alarm systems.
These microprocessor-controlled devices are designed to charge lead-acid batteries used as backup batteries for the voice alarm system while simultaneously supplying power to auxiliary equipment such as PRIMA-VA/... units. Batteries are not included.

Battery charger

- Maximum charging current: 12 A
- Two main outputs, maximum 20 A per output
- Three auxiliary outputs, maximum 5 A per output
- Battery capacity: 24?114 Ah
- Compatible with PRIMA-VA voice alarm systems
- Certified in accordance with EN 54-4
- 482 mm rack installation (19"), 2U

Manufacturer information
ATEÏS Deutschland GmbH
Bahnhofstr. 18
74906 Bad Rappenau
Germany
info.de@ateis.global
www.ateis-deutschland.de

Safety Notes and Warning Messages

The unit uses dangerous mains voltage. Leave servicing to skilled personnel only and do not insert anything into the air vents. Inexpert handling may result in electric shock.
Do not operate the unit and disconnect the mains plug from the socket immediately if the unit or the mains cable is visibly damaged; if a defect might have occurred after the unit was dropped or suffered a similar accident, if malfunctions occur. In any case, the unit must be repaired by skilled personnel.
The unit is suitable for indoor use only. Protect it against dripping water and splash water, high air humidity and heat (admissible ambient temperature range: 0 - 40 °C).
Never pull the mains cable to disconnect the mains plug from the socket, always seize the plug.
If the unit is to be put out of operation permanently, take it to a local recycling plant for a disposal which is not harmful to the environment.

SPECIFICATIONS

SON24V6AMS40RACK	
Description	battery charger
Type	EN 54-4 certification for voice alarm systems
Colour	anthracite grey (RAL 7016)
Material	metal
Suitable for	PRIMA-VA voice alarm system
Power supply	~ 230 V/50-60 Hz
Admiss. ambient temp.	-5 °C to +45 °C
Dimensions	483 x 88 x 355 mm
Weight	3.1 kg
Other features	microprocessor control
Packing unit	1
Packaging dimensions (W x H x L)	0.438 × 0.088 × 0.355 m
Net weight	3.1 kg

SON24V6AMS40RACK	
EAN code	3661944005369
Net weight	3.1 kg