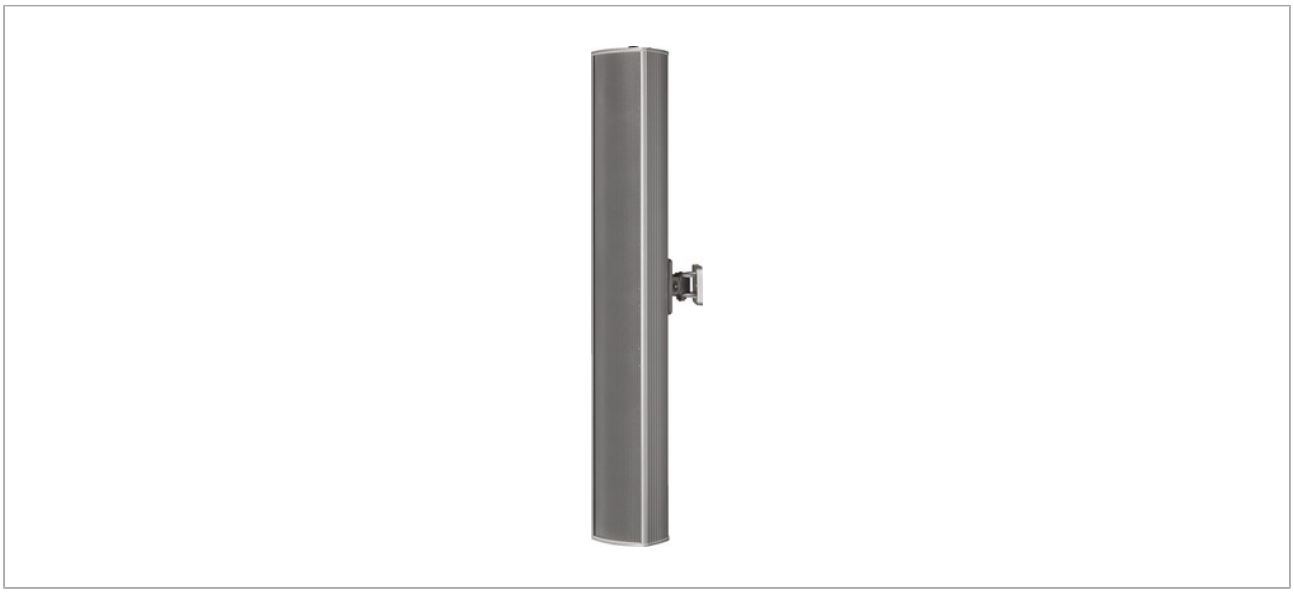


# TS-C30-700/T

Order no.: 0163720

## PRODUCT INFORMATION

**Weatherproof PA column speaker,**
with EN 54-24 certification.

- 100 V transmission technology
- 6 x 7.7 cm (3") waterproof full range speaker
- 3 power taps: 30/15/7.5 W
- Connection via ceramic terminals with thermal fuse in the cabinet
- 2 x PG9 cable gland
- Robust, plastic-coated aluminium cabinet with front protective grille
- The speaker complies with British Standard BS 5839, part 8
- Supplied with plastic wall bracket for pivoting and tilting

**Manufacturer information**
ic audio GmbH
Boehringerstr. 14a
68307 Mannheim
Germany
info@ic-audio.com

# SPECIFICATIONS

**TS-C30-700/T**

| | |
|---|---|
| Active/passive | passive |
| Transmission technology | 100 V |
| Total power rating | 30 W |
| Power rating (RMS) | 30/15/7.5 W |
| Frequency range | 200-17,000 Hz |
| Full range speaker | 6 x 77 mm |
| Number of speakers | 6 |
| Speaker size | 7.5 cm (3") |
| SPL | 97 dB/W/m |
| Max. rated SPL | 109 dB |
| Radiation angle/beam angle | H: 160°/V: 26° |
| Radiation angle, horizontal | 160° |
| Radiation angle, vertical | 26° |
| Housing material | aluminium |
| Colour | white aluminium, RAL 9006 |
| Mounting device | wall bracket |
| Protection class | IP66 |
| Admiss. ambient temp. | -20 °C to +90 °C |
| Dimensions | 100 x 700 x 92 mm |
| Width | 100 mm |
| Height | 700 mm |
| Depth | 92 mm |
| Weight | 3.8 kg |
| Inputs | ceramic screw terminals |
| Packaging dimensions (W x H x L) | 0.18 x 0.19 x 0.79 m |
| Gross weight | 4.39 kg |
| Net weight | 3.89 kg |

**TS-C30-700/T**

| | |
|---|---|
| EAN code | 4260590180506 |
| Net weight | 3.89 kg |