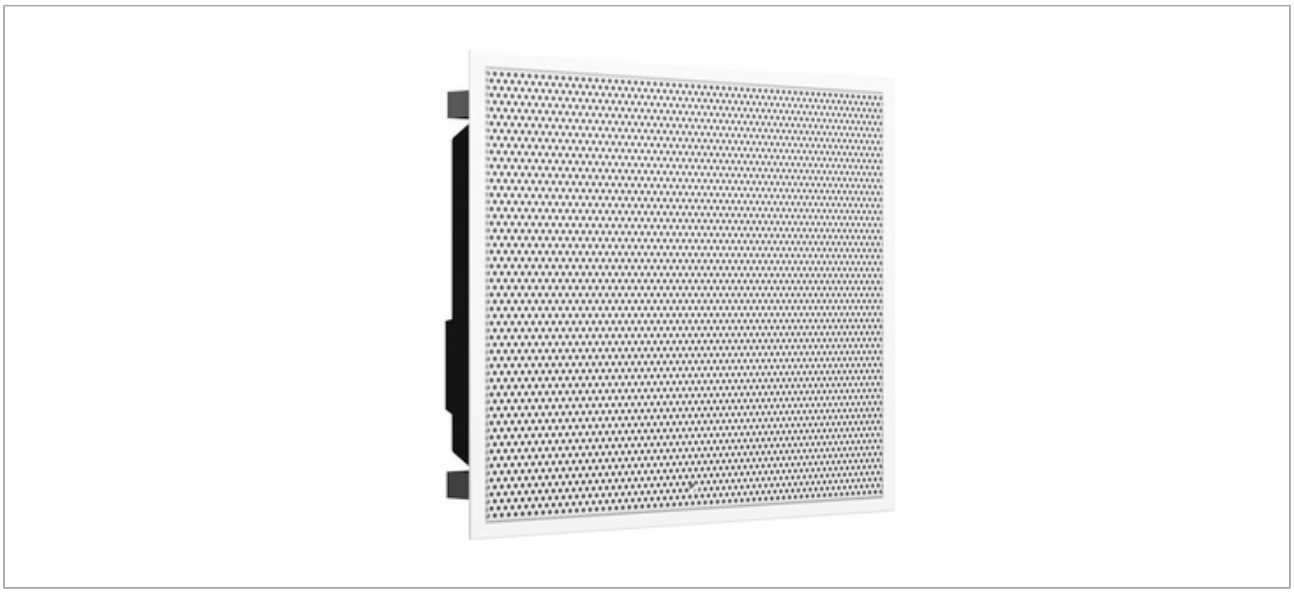


U-130-10

Order no.: 1001456

PRODUCT INFORMATION

PA wall and ceiling speaker for flush-mounting

- 100 V transmission technology
- Full-range speaker (13 cm) with tweeter cone
- Moisture-protected speaker cone
- Plastic flush-mounting shell for flush plastering into walls or solid ceilings
- Required wall hole approx. 242 x 242 x 100 mm
- Metal front grille with plastic frame
- 3 power taps via pressure clamps

Manufacturer information:
PÖSCHEL ETG e.K.
Mäuswedel 11
74223 Flein
Deutschland
info@poeschel-etg.de

SPECIFICATIONS

U-130-10

Transmission technology	100 V
Frequency range	80-18,000 Hz
Power rating (RMS)	10/5/2.5 W
SPL	93 dB/W/m
Max. rated SPL	103 dB
Radiation angle, horizontal	180°
Radiation angle, vertical	180°
Mounting cutout	242 x 242 mm
Mounting depth	100 mm
Dimensions	248 x 248 x 100 mm
Width	248 mm
Height	248 mm
Depth	100 mm
Colour	white, RAL 9010
Admiss. ambient temp.	0-40 °C
Weight	1.6 kg
Packing unit	1
Type of speaker	130
Packaging dimensions (W x H x L)	0.25 x 0.25 x 0.107 m
Gross weight	1.5 kg
Net weight	1.4 kg

U-130-10

EAN code	4007754429909
Net weight	1.4 kg