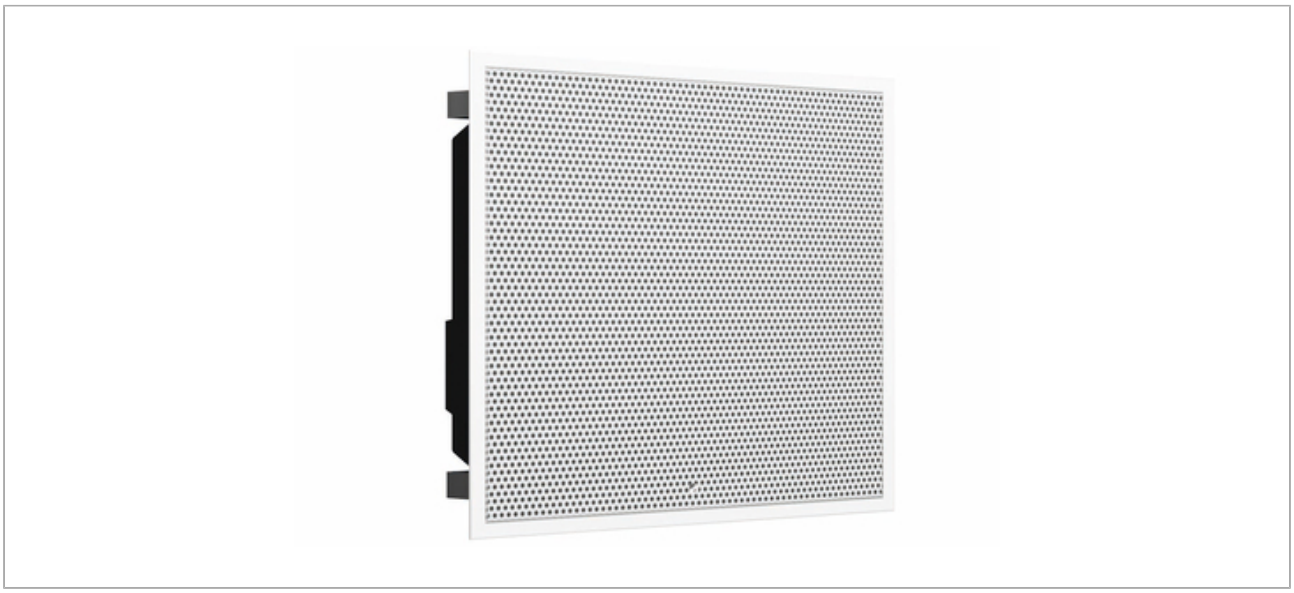


U-245-10

Order no.: 1001457

PRODUCT INFORMATION

PA wall and ceiling speaker for flush-mounting

- 100 V transmission technology
- Powerful full-range speaker (20 cm) with tweeter cone and very high sound pressure level (98 dB/1 W/1 m)
- Plastic flush-mounting shell for flush plastering into walls or solid ceilings
- Required wall hole approx. 242 x 242 x 100 mm
- Metal front grille with plastic frame
- 3 power taps via pressure clamps

Manufacturer information:
PÖSCHEL ETG e.K.
Mäuswedel 11
74223 Flein
Deutschland
info@poeschel-etg.de

SPECIFICATIONS

U-245-10

Transmission technology	100 V
Frequency range	50-18,000 Hz
Power rating (RMS)	10/5/2.5 W
SPL	98 dB/W/m
Max. rated SPL	108 dB
Radiation angle, horizontal	180°
Radiation angle, vertical	180°
Mounting cutout	242 x 242 mm
Mounting depth	100 mm
Dimensions	248 x 248 x 100 mm
Width	248 mm
Height	248 mm
Depth	100 mm
Colour	white, RAL 9010
Weight	1.9 kg
Packing unit	1
Type of speaker	200
Packaging dimensions (W x H x L)	0.25 x 0.25 x 0.107 m
Gross weight	1.8 kg
Net weight	1.7 kg

U-245-10

EAN code	4007754429916
Net weight	1.7 kg