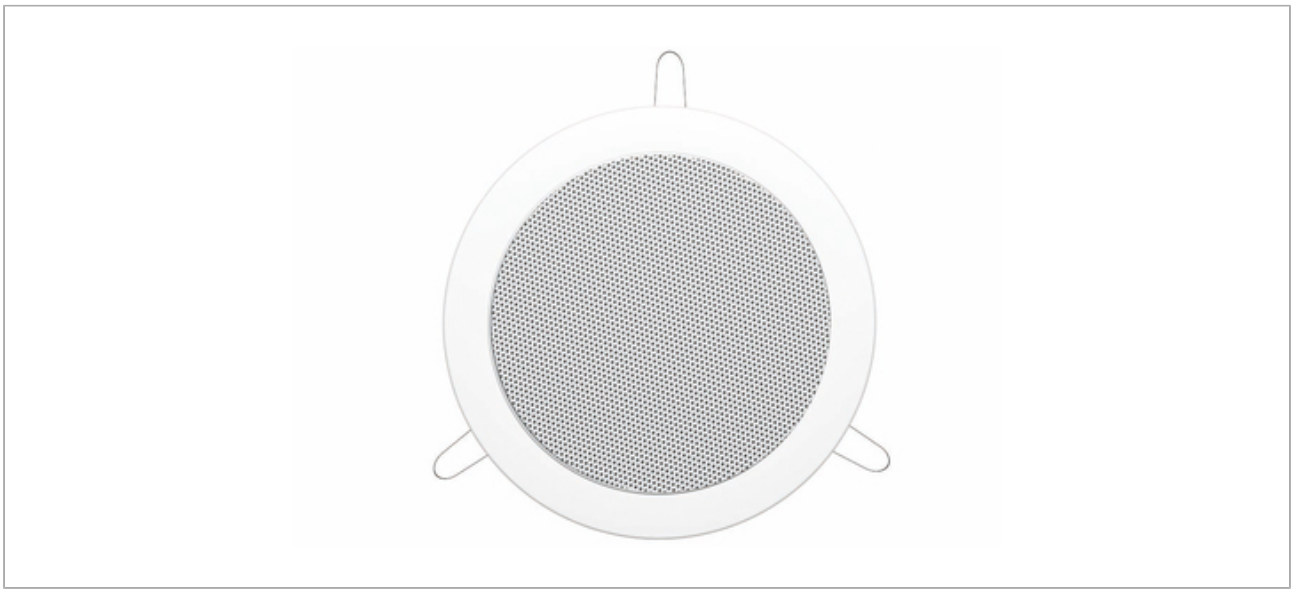


WDR-130-CX-N

Order no.: 1001496

PRODUCT INFORMATION

PA ceiling speaker, 4 Ω

- 2-way speaker system (13 cm)
- High sound quality and well-balanced frequency response, distortion-free transmission of 50 Hz signals also possible
- Quick-mounting device
- Metal housing with metal protective grille
- Connection via pressure clamps
- Ball-proof in accordance with DIN 18 032, part 3

Manufacturer information:
PÖSCHEL ETG e.K.
Mäuswedel 11
74223 Flein
Deutschland
info@poeschel-etg.de

SPECIFICATIONS

WDR-130-CX-N

Impedance (Z)	4 Ω
Transmission technology	cable
Frequency range	60-20,000 Hz
Power rating (RMS)	15 W
SPL	94 dB/W/m
Max. rated SPL	105 dB
Radiation angle, horizontal	180°
Radiation angle, vertical	180°
Mounting cutout	Ø 140-150 mm
Dimensions	Ø 167 mm x 62 mm
Outside diameter	Ø 167 mm
Width	Ø 167 mm
Height	Ø 167 mm
Depth	62 mm
Colour	white, RAL 9010
Weight	1.2 kg
Packing unit	1
Type of speaker	130
Packaging dimensions (W x H x L)	0.187 x 0.187 x 0.1 m
Gross weight	1.3 kg
Net weight	1.2 kg

WDR-130-CX-N

EAN code	4007754430295
Net weight	1.2 kg