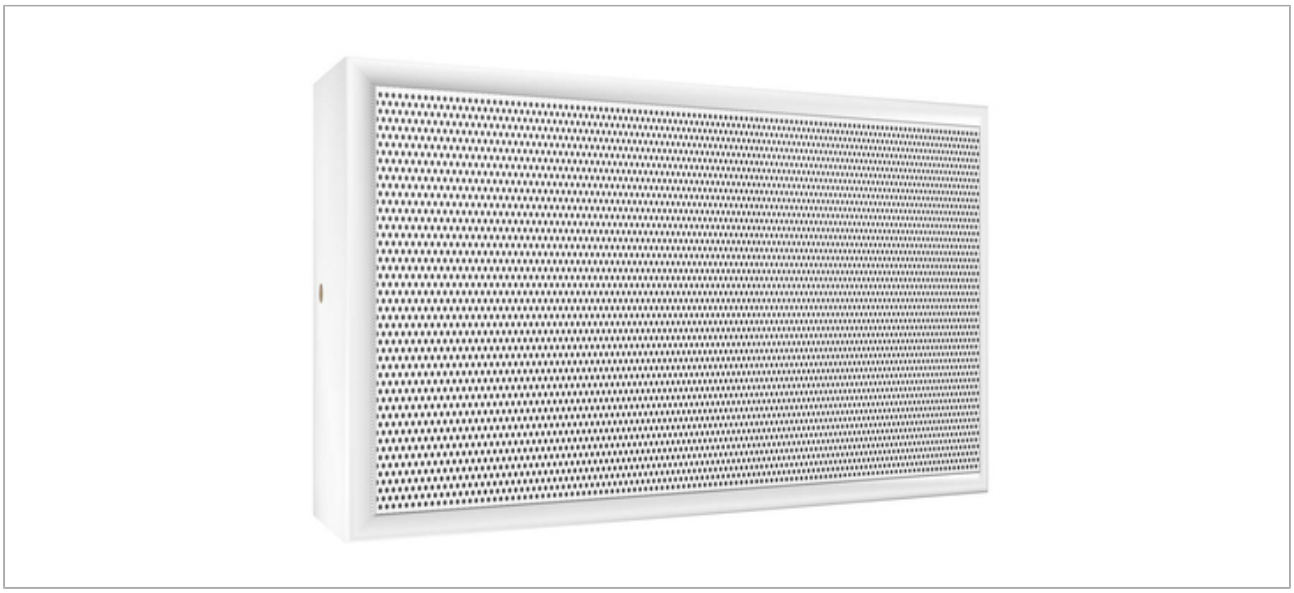


WDW-2000-A/B-EN-10

Order no.: 1001425

PRODUCT INFORMATION

PA A/B wall and ceiling speaker
with EN 54-24 certification for evacuation systems with A/B speaker distribution in accordance with EN 60849 and DIN VDE 0833-4.

- 100 V transmission technology via audio transformer with 2 x 3 power taps
- 2 separate full-range speakers (10 cm), each with its own 10/5/2.5 W transformer
- Moisture-proof speaker cone
- Wooden housing with metal protective grille
- Easy wall mounting using the supplied aluminium bracket and installation material
- Ball-proof in accordance with DIN 18 032, part 3

Manufacturer information:
PÖSCHEL ETG e.K.
Mäuswedel 11
74223 Flein
Deutschland
info@poeschel-etg.de

SPECIFICATIONS

WDW-2000-A/B-EN-10

Active/passive	passive
Transmission technology	100 V
Total power rating	2 x 10 W
Power rating (RMS)	2 x 10/5/2.5 W
Frequency range	80-20,000 Hz
Number of speakers	2
Speaker size	10 cm (4")
SPL	2 x 92 dB (1 W/1 m) 76 dB (EN, 1 W/4 m)
Max. rated SPL	2 x 102 dB (1 m) 87 dB (EN, 4 m)
Radiation angle/beam angle	H180°/V180° (500 Hz) H85°/V85° (1 kHz) H154°/V148° (2 kHz) H82°/V88° (4 kHz)
Radiation angle, horizontal	180° (500 Hz) 83° (1 kHz) 154° (2 kHz) 82° (4 kHz)
Radiation angle, vertical	180° (500 Hz) 85° (1 kHz) 148° (2 kHz) 88° (4 kHz)
Features	EN-54-24 certification
Housing material	wood
Colour	white, RAL 9010
Mounting device	aluminium bracket
Protected against ball rebound	yes
Dimensions	265 x 165 x 88 mm
Width	265 mm
Height	165 mm
Depth	88 mm
Weight	2.1 kg
Inputs	WAGO terminals
Packaging dimensions (W x H x L)	0.268 x 0.168 x 0.92 m
Gross weight	2.2 kg
Net weight	2.1 kg

WDW-2000-A/B-EN-10

EAN code	4007754429596
Net weight	2.1 kg