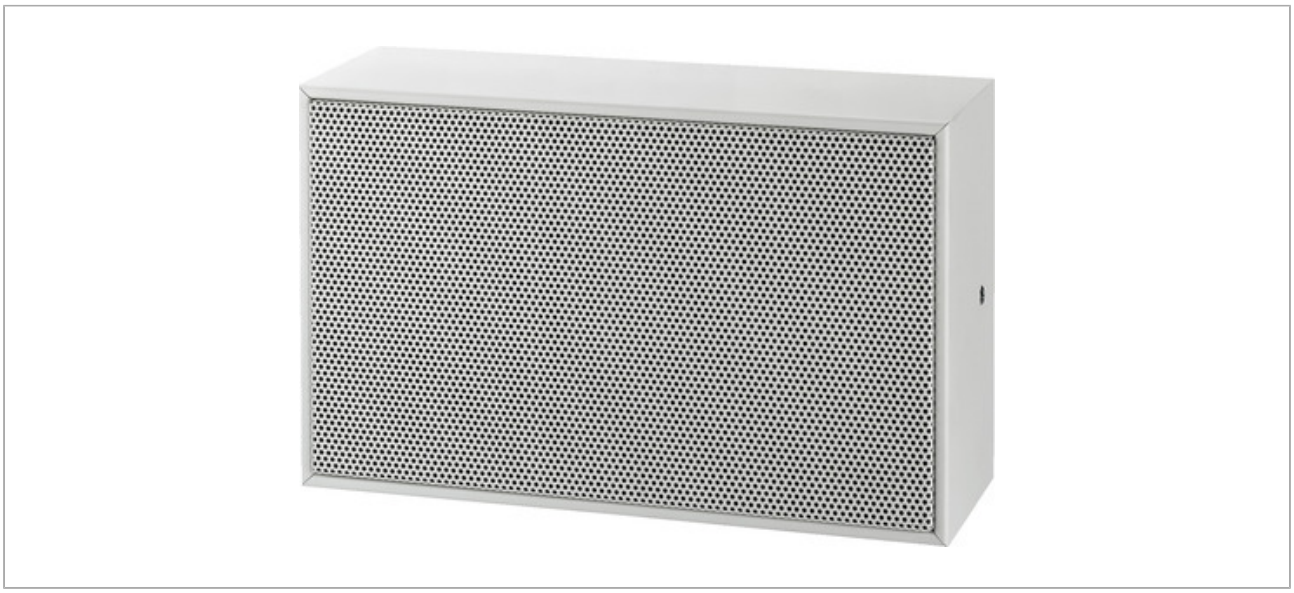


ESP-50AB/WS

Order no.: 0160120

PRODUCT INFORMATION

PA A/B wall speaker,
with EN 54-24 certification for voice alarm systems with A/B speaker distribution according to EN 60849 and DIN VDE 0833-4.

- 100 V transmission technology
- 2 separate full range speakers (10 cm), each with its own transformer 6/3/1.5 W
- Connection via 2 spring-loaded terminals inside the cabinet
- Wooden cabinet with protective metal grille
- Easy wall mounting via supplied metal bracket and mounting accessories
- Ball-proof according to DIN 18032, Part 3

Manufacturer information:
MONACOR INTERNATIONAL GmbH & Co. KG
Konsul-Smidt-Str. 68
28217 Bremen
Germany
info@monacor.com

SPECIFICATIONS

ESP-50AB/WS

Active/passive	passive
Transmission technology	100 V
Total power rating	2 x 6 W
Power rating (RMS)	2 x 6/3/1.5 W
Frequency range	120-20,000 Hz
Number of speakers	2
Speaker size	10 cm (4")
SPL	2 x 92 dB (1 W/1 m) 76 dB (EN, 1 W/4 m)
Max. rated SPL	2 x 100 dB (1 m) 85 dB (EN, 4 m)
Radiation angle/beam angle	H180°/V180° (500 Hz) H83°/V85° (1 kHz) H154°/V148° (2 kHz) H82°/V88° (4 kHz)
Radiation angle, horizontal	180° (500 Hz) 83° (1 kHz) 154° (2 kHz) 82° (4 kHz)
Radiation angle, vertical	180° (500 Hz) 85° (1 kHz) 148° (2 kHz) 88° (4 kHz)
Housing material	wood
Colour	white
Mounting device	metal bracket
Protected against ball rebound	yes
Admiss. ambient temp.	-10 °C to +50 °C
Dimensions	265 x 165 x 90 mm
Width	265 mm
Height	165 mm
Depth	90 mm
Weight	1.9 kg
Inputs	screw terminals
Packaging dimensions (W x H x L)	0.18 x 0.27 x 0.1 m
Gross weight	2.12 kg
Net weight	1.9 kg

ESP-50AB/WS

EAN code	4007754233377
Net weight	1.9 kg